


LED Flexible Neon Strip Light

1010

Planar luminescence, uniform, soft, no spot.

Two-color, silicone co-extruded one-piece molding technology is adopted. with clear cutting lines on the side and convenient cutting.

physical specifications

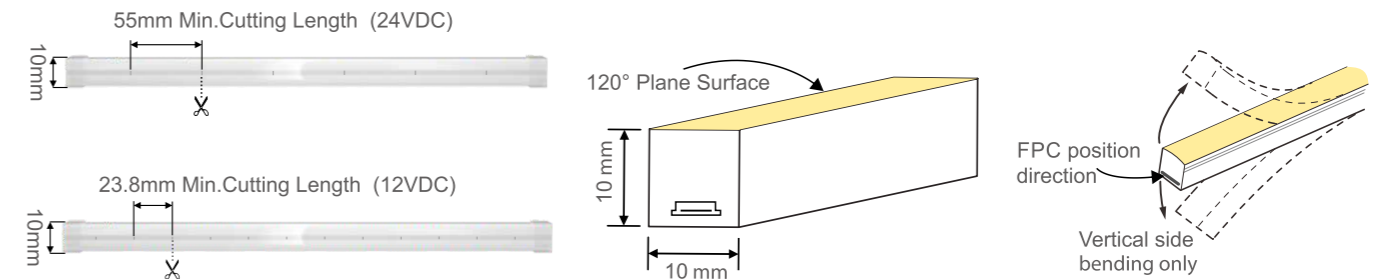


specifications parameter

IP65 CE

Model	XK1010 SERIES
Input voltage	24/12VDC
Power (lm/W)	11W/10W
Lumens (lm/m)	>450lm
CCT/Color	R B G A O P WW NW CW
CRI	>70; >80; >90;
FPC light direction	Vertical
LED type	SMD 2835
LED Qty/m	126LEDs
Min. cutting unit	7LEDs/3LEDs
Size	W10*H10mm
Working temperature	-20℃~60℃

Light distribution curve

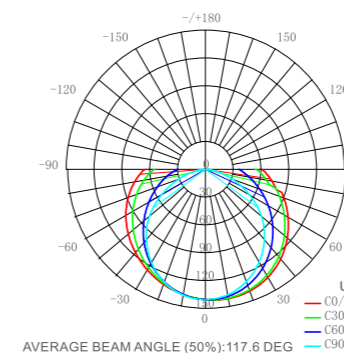

Height	Center illumination (lux)	Center height (m)	Average illuminance (lux)	Beam angle	Diameter
1.0	48.63; 132.0lx	269.01cm			
2.0	10.89; 31.32lx	538.01cm			
3.0	4.52; 13.12lx	807.02cm			
4.0	2.561; 8.47lx	1076.03cm			
5.0	1.49; 4.56lx	1345.04cm			