





Specifications parameter

Model: XLX-5050L24V60RGB10	
Input voltage	24V DC
Beam angle	120°
Colour	R/G/B
Power	14W/m
Current	RGB 0.6A/m
Brightness	RGB 520lm/m
Length/reel	5m
Cut length	100mm/unit
IP grade	IP20/IP55/IP65/IP67/IP68
Operating Temperature	-20°C +45°C
Storage temperature	0°C +60°C
Environment humidity	40~70% RH


Various waterproof solution



IP20
No waterproof
Dry location




IP55
Silicone coating
Wet location



IP65
Silicon tube
Wet location




IP67
Silicone extrusion,
empty inside
Wet location
short time under water



IP68
Silicone extrusion,
solid inside
Wet location
long time under water

Physical specifications

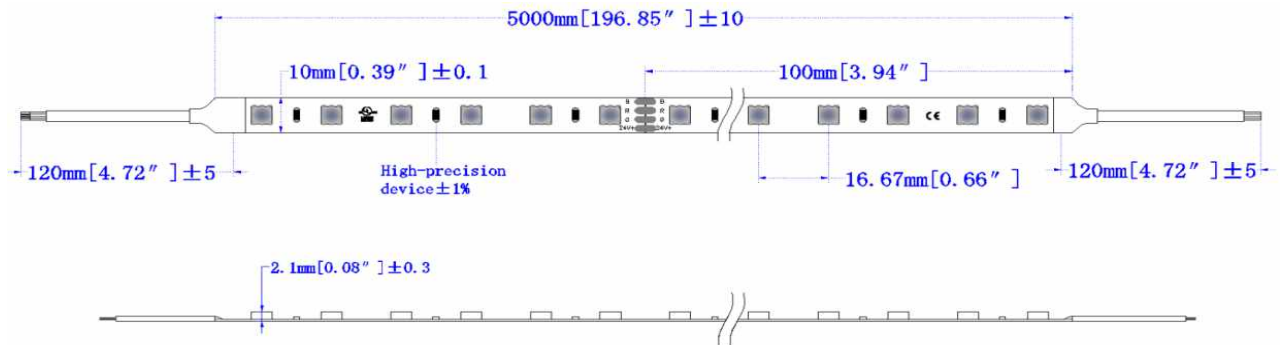

Light distribution curve

